




# ANALYTIC SYSTEMS

Power Conversion Solutions

## AC BATTERY CHARGER

### MODEL BCA610R SERIES

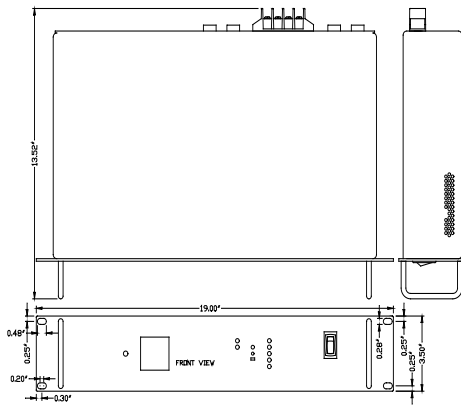

## Description

The BCA610R Rackmount Battery Charger (Rectifier)'s current mode switching design offers increased power and reliability in a compact package. The low ripple charging profile and standard equalize cycle greatly increases the lifetime of expensive battery systems.

Extra input and output filtering reduce EMI to extremely low levels. Reliability features include an input fuse, thermal shutdown, current limiting, reverse battery hookup protection and output short circuit shutdown with automatic recovery. The output voltage is easily adjusted 1.0 volts above or below the standard output voltage.

The model BCA610R Battery Charger supplies either 12, 24, 32, 48 or 72 VDC from a 110 or 220 VAC power source (Field Convertible). A high quality Digital Volt/Ammeter allows the monitoring of charging current and charging voltage.

## Benefits

- Ultra-Quiet
- Power sensitive electronics without interference
- Rugged & Reliable
- Ensure years of safe and trouble free operation
- Fast & Accurate Charging

## Design Features

- Adjustable output voltage for charging standard or deep cycle lead-acid, VRLA or Gel cell type battery
- Extremely rugged and well suited for marine and other demanding environments
- High tolerance for shock and vibration
- Ultra-quiet low EMI operation
- Can be left permanently connected
- Can function as a power supply
- Temperature compensated charging
- User selectable 2 or 3 stage charging profile
- Standard Digital Volt/Ammeter
- Audible & visual indicators for output overload, low input voltage, low output voltage & over-temperature
- Over-temperature shutdown
- Short circuit protection
- Output over-voltage crowbar
- Inrush Current Limiting with solid state bypass
- Convection cooled
- Dry contact output fail relay
- Custom output voltages available (8V to 55V)
- 3 year parts and labour warranty

## Applications

- VHF Radios
- CB Radios
- Sound Equipment
- GPS Receivers
- Plotters
- 12 Volt Lighting Systems
- Automotive Electronics Displays
- Marine Electronics Displays
- Security Systems

An ISO9001 and AS9100 Registered Company Battery Chargers • Inverters • Power Supplies • Voltage Converters

8128 River Way, Delta B.C. V4G 1K5 Canada T. 604.946.9981 F. 604.946.9983 TF. 800.668.3884 (US/CANADA)

www.analyticsystems.com

# AC BATTERY CHARGER

# MODEL BCA610R SERIES

Electrical (Input)		
Nominal (ip)	110	220
Actual (Vac)	90-130-	180 - 260
Input Amps (max)	9.3	4.7
Input Fuse (MDA)	10A	5A
Input Frequency	45-65 Hz	
Noise on Input	< 50 mV	

Electrical (Output)					
Output Nominal (op)	12	24	32	48	72
Output Volts (DC)	13.6 ± 0.05	27.2 ± 0.05	36.3 ± 0.05	54.4 ± 0.05	81.6 ± 0.05
Absorption Voltage (Vdc)	14.4	28.8	38.4	57.6	86.4
Charging Amps	40	22	16.5	11	7
Absorption to Float (15%)	6.0 Amps	3.3 Amps	2.48 Amps	1.65 Amps	1.05 Amps
Output Adjustment (Vdc)	± 1V				
Output Fuses (ATC)	40 x 2	30 x 2	20 x 2	15 x 2	15 x 2
Battery Banks	1 or 2 (3 Bank Option Available)				
Battery Size (Amp Hrs.)	160 - 240	88 - 132	66 - 99	44 - 66	22 - 33
Output Crowbar	16.0 ± 0.5V	32.0 ± 1.0V	42.7 ± 1.3V	63.9 ± 2.0V	
Output Ripple & Noise	<50 mV				
Regulation (Line & Load)	< +/- 0.5%				
Temperature Comp.	- 30 mV/°C	- 60 mV/°C	- 80 mV/°C	- 120 mV/°C	- 240 mV/°C
Duty Cycle	Continuous 100% for 24 hours per day				
Efficiency	> 75% @ Maximum Output				
Stages	2 or 3 (user selectable)				

Environmental Specification	
Operating Temp. Range	-25°C to +40°C @ maximum output . Derate Linearly 2.5% per °C from 40°C (Optional -40°C extra wide temp. operation avail.)
Humidity	0 - 95% Relative Humidity (non-condensing) with optional conformal coating
Audible Noise	NONE Ødb @ 3 ft (34.5 dB when fan operating)
Typical Service Life	> 10 yrs. (87,600 hrs)
Isolation	Input-Case & Input-Output 1500VDC. Output-Case 500VDC (1500V @ 48V Output)

Environmental Specification	
Depth	13.5 in/ 34.3 cm
Width	19.0 in/ 48.3 cm
Height	2¼(3.5 in)/ 8.9 cm
Clearance	1 inch (2.5 cm) all around
Material	Marine Grade Aluminium
Finish	Black Anodize / Powder Epoxy Coat
Fastenings	All 18-8 Stainless Steel
Weight	12.0 lb / 5.5 kg
Connections	Four contact output terminals
Warranty	3 years
Safety	Designed to meet CSA 22.2.107.1 & UL458

Note: Specifications are subject to change without notice.



**ANALYTIC SYSTEMS**  
Power Conversion Solutions

An ISO9001 and AS9100 Registered Company Battery Chargers • Inverters • Power Supplies • Voltage Converters

8128 River Way, Delta B.C. V4G 1K5 Canada T. 604.946.9981 F. 604.946.9983 TF. 800.668.3884 (US/CANADA)

www.analysystems.com