

# ANALYTIC SYSTEMS

Power Conversion Solutions

## DC/DC VOLTAGE CONVERTER

### MODEL VTC310 ISOLATED SERIES




### Benefits

- Ultra-Quiet
- Power sensitive electronics without interference
- Rugged & Reliable
- Ensure years of safe and trouble free operation

### Design Features

- Fully Isolated Design
- Adjustable output voltage
- Audible & visual indicators for constant current, low input voltage, low output voltage & over-temperature
- Over-temperature shutdown
- Short circuit protection
- Output overvoltage crowbar
- Cycle by cycle current limiting
- Reverse input protection
- Transient Voltage Suppression
- Ultra-quiet low EMI operation
- Dry contact output fail relay
- Custom input / output voltages from 8 to 360 VDC
- Remote control option
- Digital Volt/Ammeter option
- Wide Temperature operation Available
- Conformal Coating and/or Harsh Environment Ruggedization Available

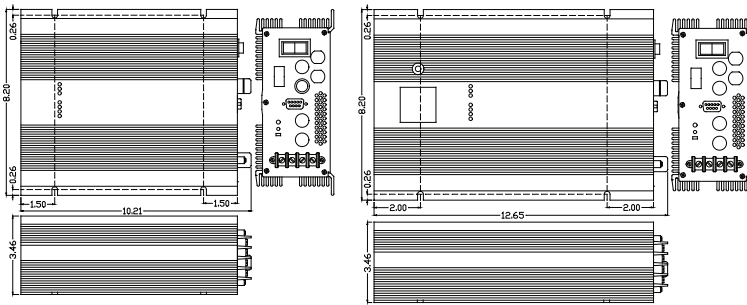

Shown without Digital Meter

Shown with Digital Meter

### Description

The model VTC310 Voltage Converter supplies 12V, 24V or 48 VDC from a 110V, 220V or 300 VDC power source. Other output voltages up to 360 volts are also available by special order.

The all-new Current Mode switching design offers increased power and reliability in a compact package. Extra input and output filtering reduce EMI to extremely low levels. Reliability features include an input fuse, thermal shutdown, current limiting and short circuit shutdown with automatic recovery.

The output voltage is easily adjusted 1.0 volts above or below the standard output voltage to accommodate special requirements. Available options include a Remote Control and/or a Digital Volt Ammeter.

### Applications

- Marine & other rugged environments
- Electric Utilities and Substations
- Manufacturing Plants
- Steel Mills
- Military Applications (COTS)
- Industrial Controls
- OEM Applications
- Solar / Alternative Power Systems
- Fuel Cells

An ISO9001 and AS9100 Registered Company Battery Chargers • Inverters • Power Supplies • Voltage Converters

8128 River Way, Delta B.C. V4G 1K5 Canada T. 604.946.9981 F. 604.946.9983 TF. 800.668.3884 (US/CANADA)

[www.analyticsystems.com](http://www.analyticsystems.com)

# DC/DC VOLTAGE CONVERTER

# MODEL VTC310 ISOLATED SERIES

Electrical (Input)			
Nominal (ip)	110	250	300
Actual (Vdc)	100-140	230-280	280-360
Input Amps (max)	4.8	2.1	1.5
Input Fuse (MDA)	6	3	2
Noise on Input	< 25 mV		
Electrical (Output)			
Output Nominal (op)	12	24	48
Output Volts (DC)	13.6 ± 0.05	27.2 ± 0.05	54.4 ± 0.05
Output Amps	20 cont. / 25 peak	10 cont. / 13 peak	5.0 cont. / 6.5 peak
Output Crowbar	16.0 ± 0.5V	32.0 ± 1.0V	63.9 ± 2.0V
Output Adjustment	± 1.0 Vdc		
Output Ripple & Noise	< 25 mV		
Transient Response	< 1V for 50% Surge		
Regulation (Line & Load)	< +/- 0.5%		
Duty Cycle	Peak 20% for 10 min max Continuous 100% for 24 hours per day		
Efficiency	> 80% @ Maximum Output		
Environment Specification			
Operating Temp. Range	-25° to +50°C @ maximum output Derate Linearly 2.5% per °C from 40°C (Optional -40°C extra wide temp. operation avail.)		
Humidity	0 - 95% Relative Humidity (non-condensing) with optional conformal coating		
Audible Noise	NONE 0db @ 3 ft		
Typical Service Life	> 10 yrs. (87,600 hrs)		
Isolation	Input-Case & Input-Output 1500VDC Output-Case 500VDC (1500VDC @ 48V O/P)		
Mechanical Specification			
Length	9.6 in / 24.4 cm		
Width	8.2 in / 20.8 cm		
Height	3.5 in / 6.4 cm		
Clearance	1 inch (2.5 cm) all around		
Material	Marine Grade Aluminium		
Finish	Black Anodize		
Fastenings	All 18-8 Stainless Steel		
Weight	7.0 lb / 3.2 kg		
Connections	Four contact output terminal		
Warranty	3 years		
Safety	Designed to meet CSA 22.2.107.1 & UL458		

Note: Specifications are subject to change without notice.



**ANALYTIC SYSTEMS**  
Power Conversion Solutions

An ISO9001 and AS9100 Registered Company Battery Chargers • Inverters • Power Supplies • Voltage Converters

8128 River Way, Delta B.C. V4G 1K5 Canada T. 604.946.9981 F. 604.946.9983 TF. 800.668.3884 (US/CANADA)

[www.analiticsystems.com](http://www.analiticsystems.com)